

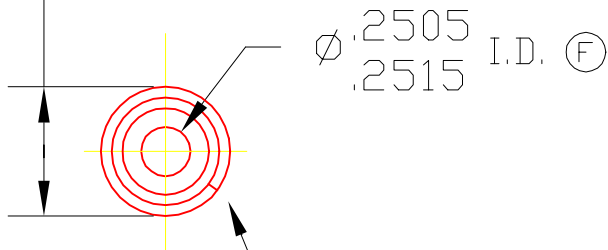


HA4104P

MINIMUM OF (200 LBS.)
PRESS FIT IN .656
DIA. HOLE.

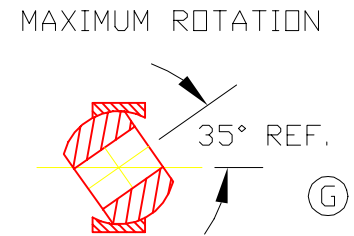

SEAM MAY BE OPEN

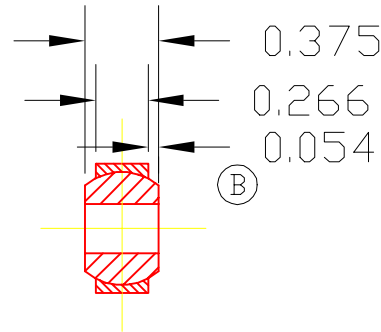

CUSTOMER REFERENCE NOTE: The recommended tolerance for the diameter of the mounting hole into which the ball bushing (H) is pressed is +0.000", -0.001". The press fit will increase with a decrease in hole diameter. Freedom of movement of the spherical bushing in it's retainer may decrease as the press fit increases.

STAMPED WITH TRIANGLE
NAME STAMP

CHANGE LEVEL
H 12-02-03

(D)	2	6093	RETAINER	1
	1	4104P	BRG. BALL	1
DET	PART NUMBER	DESCRIPTION	AMT	

△ TRIANGLE MANUFACTURING CO.
OSHKOSH, WI.

NAME BALL & RET. ASS'Y

USED IN HA SERIES

DATE 7-22-82

PART NO.

DRAWN LML

CHECKED MJK

SCALE 1 / 1

HA4104P

(A)	FIT LIGHT DRAG - SNUG
	PLATING ////
	MATERIAL SEE DETAILS
	ALL DIMS ±.02 UNLESS SPECIFIED