



HA4105P

MINIMUM OF (200 LBS.)
PRESS FIT IN .656
DIA. HOLE.

STAMPED WITH TRIANGLE
NAME STAMP

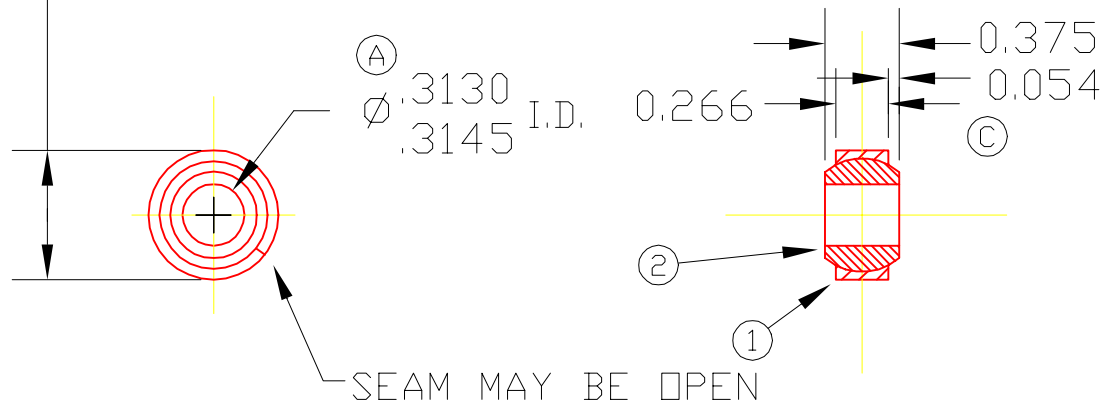

MAXIMUM ROTATION



CUSTOMER REFERENCE NOTE: The recommended tolerance for the diameter of the mounting hole into which the ball bushing is pressed is +0.000", -0.001". The press fit will increase with a decrease in hole diameter. Freedom of movement of the spherical bushing in it's retainer may decrease as the press fit increases.

(E)	2	6093	RETAINER	1
	1	4105P	BRG. BALL	1
DET	PART NUMBER	DESCRIPTION	AMT	

△ TRIANGLE MANUFACTURING CO.
OSHKOSH, WI.

NAME BALL & RET. ASS'Y

USED IN HA SERIES

DATE 5-2-79

PART NO.

DRAWN LML

CHECKED SP

SCALE 1 / 1

HA4105P

(B) FIT LIGHT DRAG - SNUG

PLATING ////

MATERIAL SEE DETAILS

ALL DIMS ±.02 UNLESS SPECIFIED

CHANGE LEVEL

G 12-28-01