
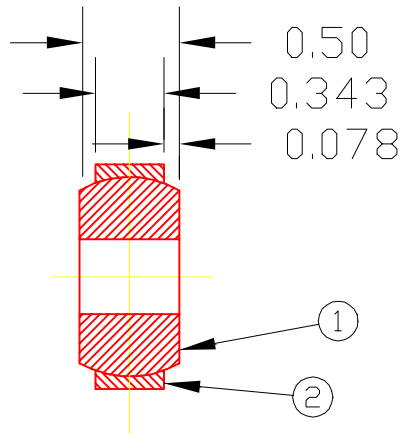


HE1406P

STAMPED WITH TRIANGLE
NAME STAMP

SEAM MAY BE OPEN


0.3770
0.3755 BORE

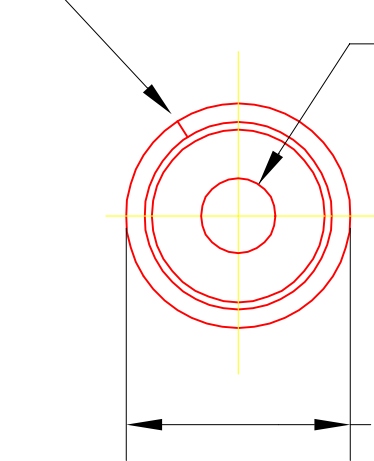

MINIMUM OF (200 LBS.)
PRESS FIT IN 1.125
DIA. HOLE.

CUSTOMER REFERENCE NOTE: The recommended tolerance for the diameter of the mounting hole into which the ball bushing is pressed is +0.000", -0.001". The press fit will increase with a decrease in hole diameter. Freedom of movement of the spherical bushing in it's retainer may decrease as the press fit increases. ©

MAXIMUM ROTATION



2	1406P	BRG. BALL	1
1	4014	RETAINER	1

DET	PART NUMBER	DESCRIPTION	AMT
-----	-------------	-------------	-----

A TRIANGLE MANUFACTURING CO.
OSHKOSH, WI.

NAME BALL & RET. ASS'Y

USED IN HE SERIES

DATE 10-27-88

PART NO.

DRAWN SP

CHECKED SP

SCALE 1 / 1

HE1406P

FIT LIGHT DRAG - SNUG

PLATING ELECTRO-ZINC

MATERIAL SEE DETAILS

ALL DIMS ±.02 UNLESS SPECIFIED

CHANGE LEVEL

C 12-10-03