


HE1408P


STAMPED WITH TRIANGLE
NAME STAMP

SEAM MAY BE OPEN

0.5020
0.5005 BORE

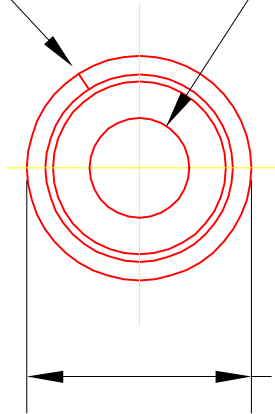


MINIMUM OF (200 LBS.)
PRESS FIT IN 1.125
DIA. HOLE.

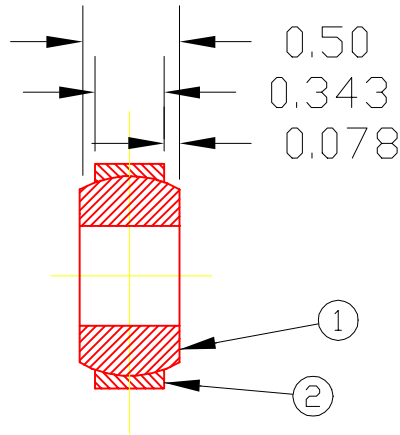

CUSTOMER REFERENCE NOTE: The recommended tolerance for the diameter of the mounting hole into which the ball bushing is pressed is +0.000", -0.001". The press fit will increase with a decrease in hole diameter. Freedom of movement of the spherical bushing in it's retainer may decrease as the press fit increases. (E)

MAXIMUM ROTATION

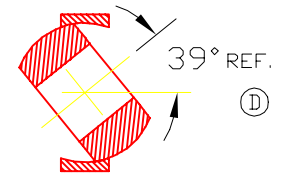

2	1408P	BRG. BALL	1
1	4014	RETAINER	1
DET	PART NUMBER	DESCRIPTION	AMT

A TRIANGLE MANUFACTURING CO.
OSHKOSH, WI.

NAME BALL & RET. ASS'Y

USED IN HE SERIES

DATE 9-30-71

PART NO.

DRAWN SP
CHECKED SP

SCALE 1 / 1

HE1408P

(A)

FIT LIGHT DRAG - SNUG

PLATING ELECTRO-ZINC

MATERIAL SEE DETAILS

ALL DIMS ±.02 UNLESS SPECIFIED

(B)

CHANGE LEVEL

E 12-10-03