


HE1508P


STAMPED WITH TRIANGLE
NAME STAMP

SEAM MAY BE OPEN

0.5005
0.5020 BORE

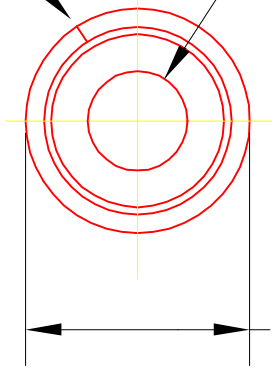


MINIMUM OF (200 LBS.)
PRESS FIT IN 1.125
DIA. HOLE.

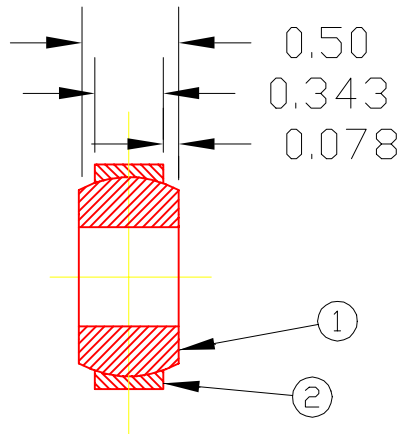

CUSTOMER REFERENCE NOTE: The recommended tolerance for the diameter of the mounting hole into which the ball bushing (E) is pressed is +0.000",-0.001". The press fit will increase with a decrease in hole diameter. Freedom of movement of the spherical bushing in it's retainer may decrease as the press fit increases.

MAXIMUM ROTATION

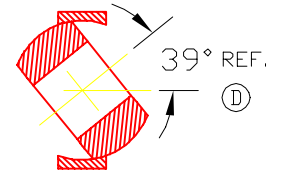

| 2 | 1508P | BRG. BALL | 1 |
|-----|-------------|-------------|-----|
| 1 | 4014 | RETAINER | 1 |
| DET | PART NUMBER | DESCRIPTION | AMT |

A TRIANGLE MANUFACTURING CO.
OSHKOSH, WI.

NAME BALL & RET. ASS'Y

USED IN HE SERIES

DATE 7-1-70

PART NO.

DRAWN SP
CHECKED SP

SCALE 1 / 1

HE1508P

(B)

FIT LIGHT DRAG - SNUG

PLATING ELECTRO-ZINC

MATERIAL SEE DETAILS

ALL DIMS ±.02 UNLESS SPECIFIED

(A)

CHANGE LEVEL

E 12-10-03